


FEATURES

- | For up to 1,650 gal. of total sprinkler pipe capacity
- | UL 508A listed Industrial Control Panel
- | FM1035 approved
- | Dual-Bed PSA technology
- | BlastOff™ I - Leak Detection System
- | BlastOff II - Auto Air Bypass Alarm
- | Integrated air compressor (not intended for quick-fill)
- | Integrated nitrogen receiver tank
- | Touchscreen/HMI with Smart-Trak™ technology
- | Optional BlastOff III - Early Warning System
- | Optional BlastOff IV - Onboard Purity Alarm
- | Optional STS-NF-QF-2 air compressor available for quick-fill operation (635 gal. @ 40 PSI)

UNIT DETAILS

N ₂ Blast FPS-1650	
Part Number	
N ₂ Generation System	FPS-01650
AutoPurge System [®]	A03-APS2
Dimensions	
A (Width)	26.0"
B (Depth)	18.06"
C (Height)	67.5"
Unit Weight	223 lbs.
Tank Dimensions/Weight	Integrated
Unit Details	
Max FPS Capacity	1,650 Gallons
Nitrogen Purity	98% +
Mount	Floor
Electrical	110 VAC / 7.1 Amp / 1 Phase
Maintenance	Annual or 1,000 Hours ¹
Warranty	One Year ²

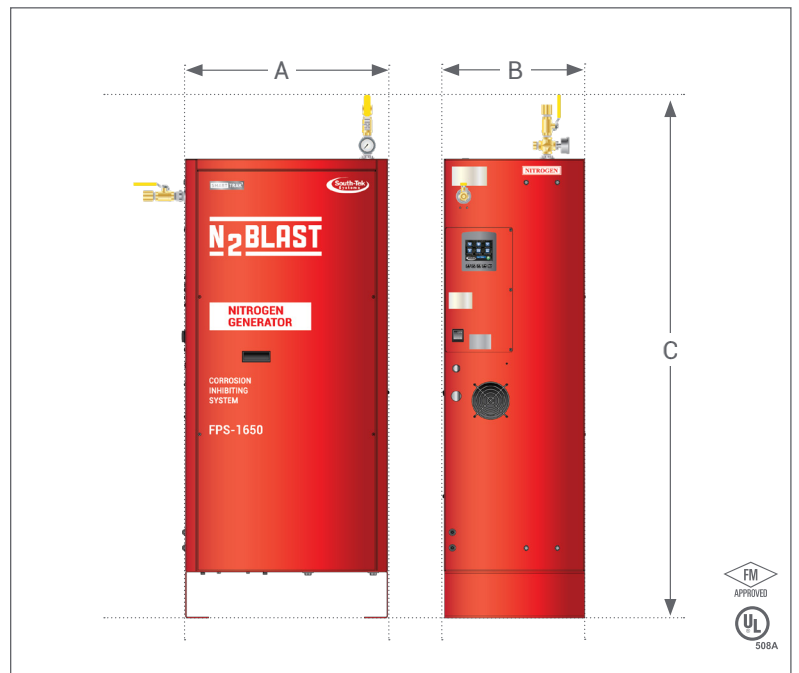

1. Whichever comes first per STS terms and conditions.
2. Extended warranty options available.

OPTIONAL EQUIPMENT

Part Number	Product Description
STS-NF-QF-2	2 HP Quick-fill Compressor
A02-QCP	Quick-Check [®] Portable N ₂ Purity Sensor
B20-A-002I	BlastOff III - Early Warning System
A02-MO2-4C	BlastOff IV - Onboard Purity Alarm
A02-QCF (PST or 6PST)	N ₂ Blast AutoPurge System 1 or 6 Zone Timer
A02-QCF-PS (1PM, 6PM, 10PM, or 20PM)	Quick-Check Single or Multi-Zone Purity Manifold
PM Box-003	Preventative Maintenance Box (2 years of Annual Filter Kits)